

1) Optical axis receiver, 2) Optical axis emitter, 3) Stability, 4) Output function, 5) Removable cover



### Basic features

Approval/Conformity	CE UKCA cULus WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Series	64K
Style	Square Connection 45°

### Display/Operation

Adjuster	Potentiometer 240° (2x) Slide switch (4x)
Display	Output function- LED yellow Stability - LED green
Setting	Time function Light-on/dark-on Rated switching distance (Sn)

### Electrical connection

Cable diameter D	8...10 mm
Connection	Screw terminals
Polarity reversal protected	yes
Protection against device mix-ups	yes

### Electrical data

No-load current I <sub>o max.</sub> at U <sub>e</sub>	25 mA
Operating voltage U <sub>b</sub>	24...60 VDC/24...240 VAC
Protection class	II
Rated insulation voltage U <sub>i</sub>	250 V AC
Rated operating current I <sub>e</sub>	3000 mA
Rated operating voltage U <sub>e AC</sub>	230 V
Rated operating voltage U <sub>e DC</sub>	24 V
Ripple max. (% of U <sub>e</sub> )	10 %
Switching frequency	20 Hz
Turn-off delay t <sub>off max.</sub>	25 ms
Turn-on delay t <sub>on max.</sub>	25 ms
Utilization category	AC-140

Photoelectric Sensors  
**BOS 64K-AA-ID10-TG**  
 Order Code: BOS01K2



Environmental conditions

<b>Ambient temperature</b>	-25...55 °C
<b>EN 60068-2-27, Shock</b>	Half-sinus, 30 gn, 11 ms, 3x6
<b>EN 60068-2-6, Vibration</b>	10...55 Hz, amplitude 0.5 mm, 3x30 min
<b>IP rating</b>	IP67

Functional safety

<b>MTTF (40 °C)</b>	289 a
---------------------	-------

Interface

<b>Duration of time function</b>	T = 0.6...16 s
<b>Switching output</b>	Relay NO/NC change-over contact
<b>Time function</b>	switch-off delay On/off delay Turn-on delay Single pulse

Material

<b>Housing material</b>	PBT, GF30
<b>Material sensing surface</b>	PC

Remarks

Reference object (target): gray card, 200 x 200, 90 % remission, axial approach.  
 For additional information, refer to user's guide.  
 Order accessories separately.  
 For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Mechanical data

<b>Dimension</b>	25 x 69.7 x 100.4 mm
<b>Mounting part</b>	Screw M4
<b>Tightening torque max.</b>	1.2 Nm


Optical features

<b>Ambient light max.</b>	5000 Lux
<b>Beam characteristic</b>	Divergent
<b>LED group per IEC 62471</b>	Exempt Group
<b>Light type</b>	Infrared
<b>Principle of optical operation</b>	Diffuse sensor, energetic
<b>Switching function, optical</b>	Light-on dark-on
<b>Wave length</b>	940 nm


Range/Distance

<b>Range</b>	50...2000 mm
<b>Rated operating distance Sn</b>	2 m, Adjustable

Wiring Diagrams (Schematic)



## Help Views

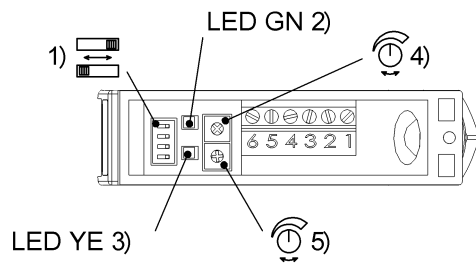

- 1) Light-on/dark-on, time funct
- 2) Stability
- 3) Output function
- 4) Sensitivity
- 5) Delay time

## Opto Symbols

