


OGT102



Diffuse reflection sensor

OGT-HNKG/US

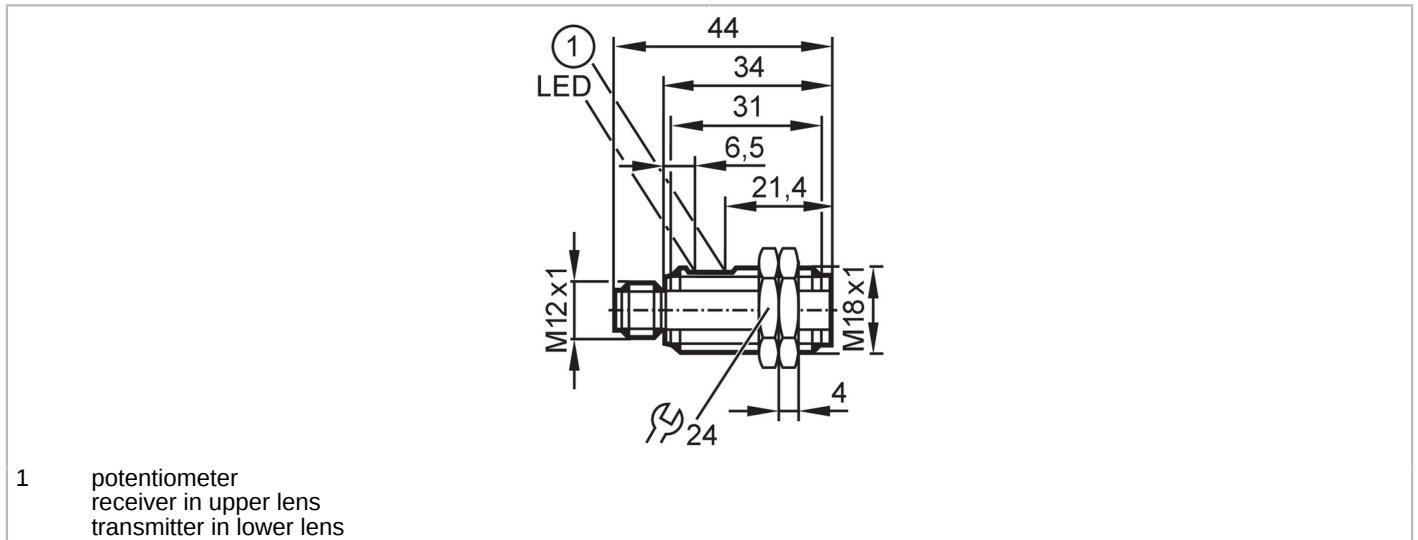

Product characteristics	
Type of light	red light
Housing	threaded type
Application	
Function principle	Diffuse reflection sensor
Application	For use in conveying and materials handling
Electrical data	
Operating voltage [V]	10...30 DC
Current consumption [mA]	20
Protection class	III
Reverse polarity protection	yes
Type of light	red light
Outputs	
Electrical design	NPN
Output function	light-on mode
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	1000
Short-circuit protection	yes
Overload protection	yes
Detection zone	
Range [mm]	10...400; (white paper 200 x 200 mm 90% remission)
Setting range [mm]	70...400
Range adjustable	yes
Max. light spot diameter [mm]	25
Light spot dimensions refer to	at maximum range

OGT102



Diffuse reflection sensor

OGT-HNKG/US

Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 65; (in conjunction with a corresponding connector)
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[years]	894
Mechanical data		
Weight	[g]	15.1
Housing		threaded type
Dimensions	[mm]	M18 x 1 / L = 44
Thread designation		M18 x 1
Materials		housing: ABS
Lens material		front pane:PMMA
Displays / operating elements		
Display	switching status	1 x LED, yellow
Operating elements		potentiometer
Accessories		
Items supplied		lock nuts: 2
Remarks		
Pack quantity		1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4



Connection

